


# CORNER CADDY INSTALLATION

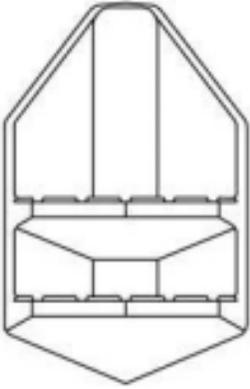

Our corner caddy has been designed with an integral hook and separate cast bracket which allows it to be fitted into any 90 degree corner wall configuration, such as in a shower or above a bathtub. Before actual installation, position the accessory to check for a true fit.

An “out-of-square” wall condition may be compensated for by grinding the rear surfaces of the casting to achieve a flush fit.

**The following instructions detail the correct procedure for obtaining a secure attachment of the hanger bracket and installation of the corner caddy. The instructions should be read completely before starting the work, and followed in sequence.**

**Step 1.** Using a 3/16 masonry drill bit, make 2 holes in the center of the mounting bracket.

**Step 2.** Locate the hanger bracket in the wall corner. Use the pre-drilled holes in the bracket as a drill guide, and drill through the wall panels to wood studs. **DO NOT DRILL INTO THE WOOD STUDS.**

**Step 3.** Remove the hanger bracket and apply 100% silicone adhesive to the back of the hanger. Apply silicone to the screw shafts. Locate the hanger bracket, pressing it into the corner. Insert 2 1/2” x 1/8” wood screws through the bracket holes and into the wall holes.

**Step 4.** Drive the screws firmly into the wall stud. Do not over tighten the screws as this could damage the bracket. Wipe off any excess silicone, ensuring that a waterproof seal is obtained. Make sure that the bracket is firmly attached and does not freely move when vertical or horizontal pressure is applied.

**Step 5.** The caddy can now be mounted on the hanger bracket. Apply a bead of silicone to the back of the caddy, approximately 1” from the edge. Also, apply a small amount of silicone on the top of the hanger bracket where the hanger bracket and the holder meet. Too much silicone will not allow the holder to set to the wall.

**Step 6.** To mount the holder, simply set it on the hanger and press it to the wall. The design of the system will allow the two pieces to grasp each other without effort. Do not put an excessive amount of force on the hanger when the holder is being mounted—it can cause the mounting hanger to become loose or even break.

**Step 7.** Remove any excess silicone squeezed out during installation, making sure that a complete and waterproof seal is obtained. **The finished installation should be allowed to cure for several hours before actual use.**

**KEEP YOUR NORTH COAST CULTURED PRODUCT IN A CLIMATE-CONTROLLED SPACE AND IN THE ORIGINAL PACKAGING, LAYING FLAT UNTIL INSTALLED.**